

HALOGEN FREE

REVISIONS

REV	DESCRIPTION	DWN	DATE
G	MODIFY NOTE	ALDO	2018-03-22
H	UPDATE DRAWING	KELLY	2018-04-18

NOTES:

1.MATERIAL:

1-1:HOUSING:LCP;UL 94V-0,COLOR:BLACK
COLOR:BLACK1-2:COVER:LCP;UL 94V-0,COLOR:BLACK
COLOR:BLACK

1-3:GROUND PIN:

TREATMENT:PHOSPHOR BRONZE;T=0.30mm
GOLD ON CONTACT AREA,MATTE SN 80u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.

1-4:POWER PIN:PHOSPHOR BRONZE;T=0.30mm

TREATMENT:

GOLD ON CONTACT AREA,MATTE SN 80u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.

1-5:DETECT PIN:PHOSPHOR BRONZE;T=0.30mm

TREATMENT:

GOLD ON CONTACT AREA,MATTE SN 80u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.

1-6:SHELL:SUS ;T=0.35mm,TREATMENT:50u" NI

1-7:MYLAR:THERMOPLASTIC;COLOR:YELLOW

SPECIFICATION:

2. ELECTRICAL CHARACTERISTICS:

2.1 RATED :20V 7A

2.2 INSULATION RESISTANCE 100MOHMS MIN AT500V DC AFTER 1 MINUTE

2.3 DIELECTRIC WITHSTANDING VOLATAGE: 150V AC FOR 1 MINUTE,

2.4 CONTACT RESISTANCE:30 MOHMS MAX.

3. MECHANICAL CHARACTERISTICS:

3.1 INSERTION FORCE:3.0 Kgf MAX


EXTRACTION FORCE:0.35 Kgf Min
3.2 DURABILITY<INSERTION/EXTRACTION CYCLES>:5000 CYCLES

4. PART NUMBER:

DCJ-034-1N03HX

L PLATE ON CONTACT AREA:
G: GOLD FLASH

SCHEMATIC




DC PLUG






GENERAL TOLERANCES (OTHERWISE SPECIFIED)		SCALE NONE	DESIGN UNITS MILIMETER
4 PLS	±	DRAWN BY KELLY	DATE 2018-04-18
3 PLS	±	CHECKED BY	DATE
2 PLS	± 0.20	APPROVED BY	DATE
1 PLS	± 0.30		
ANGLES	± °		
QUALITY SYMBOLS	$\nabla=0$	DRAWING NO. SD-DCJ034-001	PART NO. DCJ-034-1N03HX

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO VITECK
CORP., LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSIONTHIRD ANGLE
PROJECTIONDWG REV.
HSHEET NO.
1 OF 1

SIZE

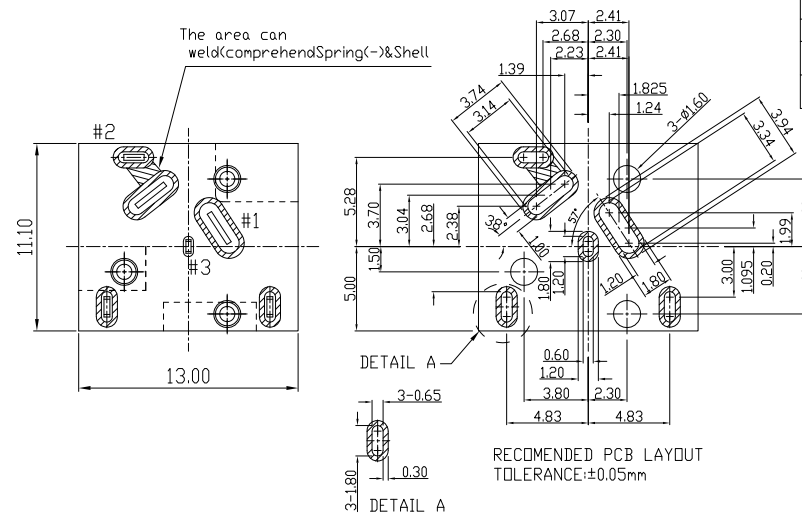D/C
(年 月 日)RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

DETAIL A

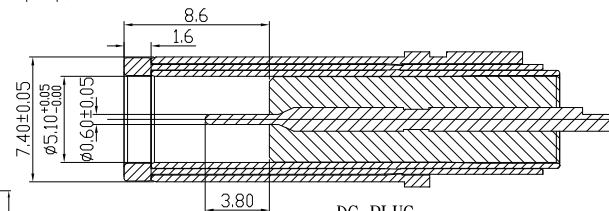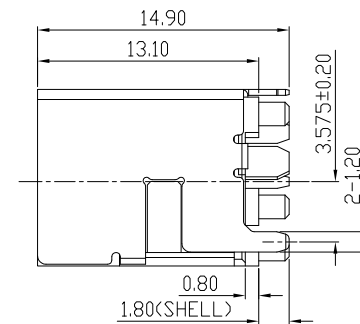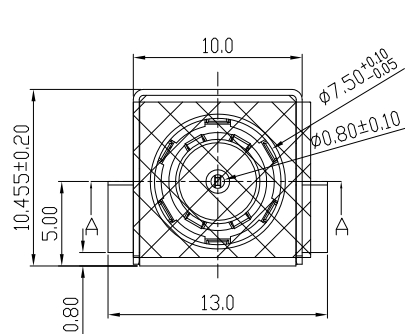


SECTION A-A

HALOGEN FREE



REVISIONS

REV	DESCRIPTION	DWN	DATE
A	RFQ-16-129-1	JACK WU	2016-11-29
B	FIX DRAWING	JACK WU	2017-04-05

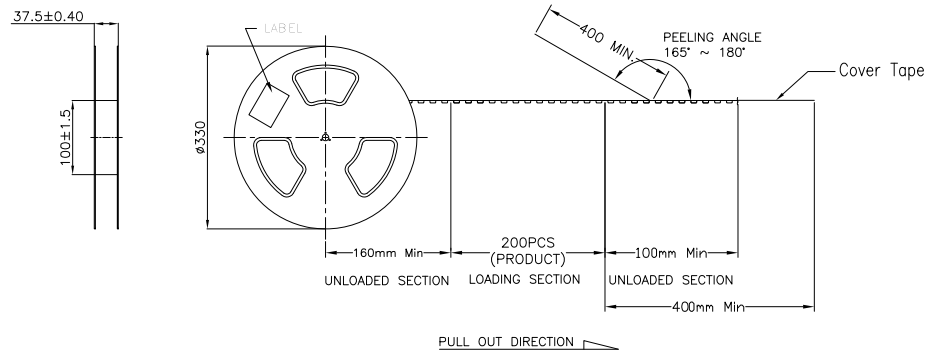

NOTES:

1. 每卷REEL(Φ330)可包裝數量:200PCS
2. 搭配COVER TAPE寬度:25.5mm
3. 10 REEL/CARTON
4. TOTAL:2000PCS

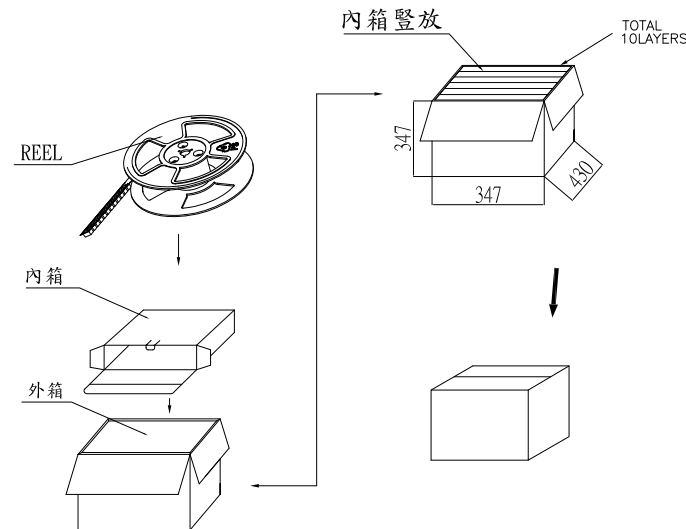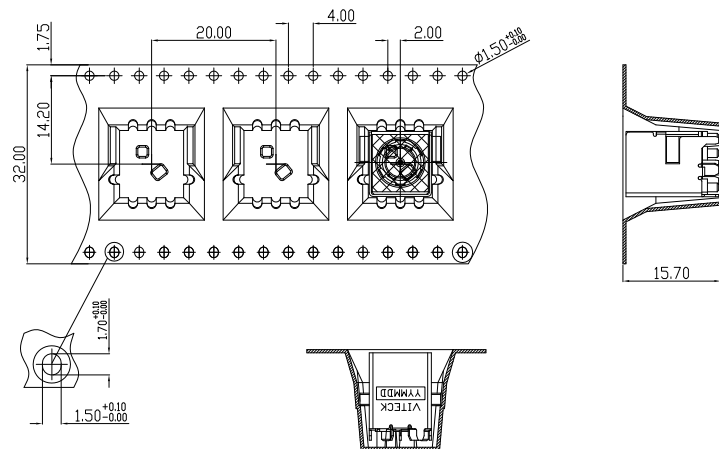

GENERAL TOLERANCES (OTHERWISE SPECIFIED)		SCALE NONE	DESIGN UNITS MILIMETER	 VITECK CO., LTD.			
	mm	DRAWN BY JACK WU	DATE 2016-11-29	TITLE DC POWER JACK VERTICAL H=13.1mm PACKING			
4 PLS	+	CHECKED BY	DATE				
3 PLS	±	APPROVED BY	DATE				
2 PLS	±						
1 PLS	±						
ANGLES	± °			PART NO. DCJ-034-1N03HX			
QUALITY SYMBOLS		DRAWING NO. PK-DCJ034-001					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO VITECK CORP, LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				 THIRD ANGLE PROJECTION	DWG. REV. B	SHEET NO. 1 OF 1	SIZE